



# Delta SIP Speaker

## Function Highlights

- PoE enabled (Power Over Ethernet)
- **Horn Installation**

## Output Power

- 10w: PoE/12V DC 1A PSU**
- 20w: PoE/18V DC 2A PSU**
- 30w: PoE/24V DC 2A PSU**

## Audio Features

- Narrowband speech coding: G.711a/u, G.723.1, G.726-32K, G.729AB
- Wideband speech coding: G.722

## Network/Security features

- Support PoE
- support the DNS and secondary DNS server
- Support VLAN
- DHCP / static / PPPoE
- Support SRTP
- Support web page HTTP / HTTPS

## Configuration and Management

- Web management interface
- Software upgrade

## Physical Specification

- LAN port: 10/100BASE-Tx, Auto-MDIX, RJ-45
- Main chip: Broadcom
- Output power: according to the power supply voltage
- Frequency range: 75 Hz - 20 kHz
- Power supply: 12V 2A/ 18V 2A/24V 2A DC or PoE(48V)
- Working temperature: - 10 ~ 50 °C
- Storage temperature: - 10 ~ 50 °C · Relative humidity: 20 ~ 80%
- Package weight: 3.1 kg

## Applications



Business



Shopping Mall



Education



School



Transportation




Parking Lot



Public



Playground

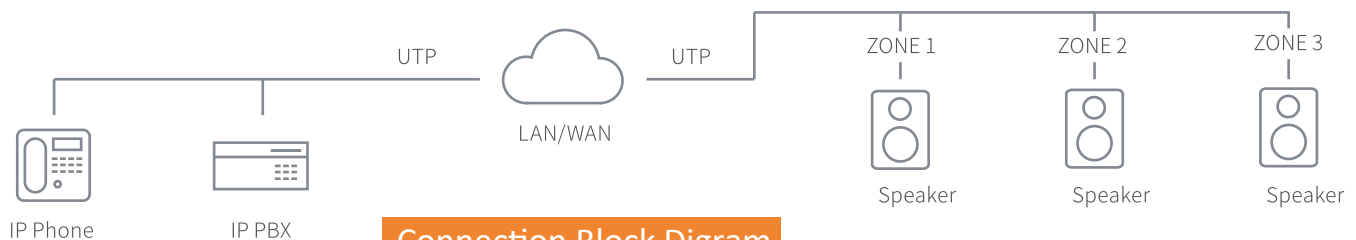

Connection Block Diagram